



OPERATING INSTRUCTIONS


METAL BUCKLE



- 1** Insert end of strapping up through buckle and around open leg to form a loop. Pull loop tight around leg.




- 2** Wrap strapping around package. Loop strapping around remaining open leg of buckle. Pull loop tight around leg.

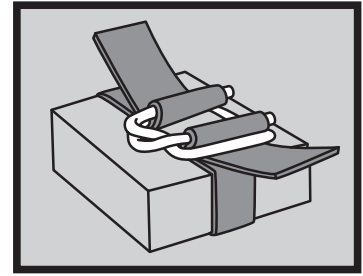


- 3** Hold package securely and tighten strap to desired tension using tensioner (see below).


PLASTIC BUCKLE



- 1** Make a small loop with strapping and insert through plastic buckle. Fold buckle leg into loop. Pull the strap tight.




- 2** Wrap strapping around package and repeat step 1 with remaining end.

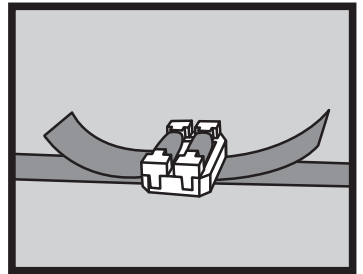


- 3** With both legs folded down, tighten strapping using the tensioner (see below).


TENSIONER



- 1** Excess strap should be removed. Insert remaining strapping between pulling-and-locking bars of tensioner



- 2** Flip tensioner up. Maintain alignment of strap so it will not slip in next step. Firmly grip strap on corner of carton with with free hand. Pull tensioner towards you.

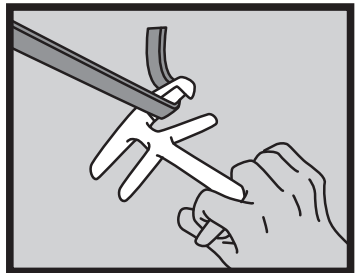

- 3** When desired tension is obtained, cut excess strap away with blade-end of tool.

SAFETY INSTRUCTIONS

1. Read the operating instructions carefully.
2. Wear proper eye, face and hand protection.
3. Do not put hands or other body parts between the strap and the package.
4. While tensioning, do not stand in direct line with the strap as it could break.
5. Exercise caution when cutting strap as it may snap or spring back.