


# STRAPPING SEALS

## Seals for Steel Strapping

All PAC steel strapping seals are made from precision tested galvanized steel. Engineered for high joint efficiency with regular duty and heavy duty steel, all PAC seals meet federal government standards, along with ASTM Standard D3953. In addition to the stock sizes listed, we can also supply steel seals for many combination tools, including Signode.

### Regular Duty

PRODUCT	STRAP SIZE (inches)	SEAL LENGTH (inches)	THICKNESS (inches)	SHIPPING WGT. (lbs./M)
<b>OPEN SEALS</b>				
OST38	3/8"	1.125	.020	5
OST48	1/2"	1.25	.020	6
OST58	5/8"	1.25	.020	8
OST68	3/4"	1.25	.020	10
<b>OVERLAP SEALS (PUSH TYPE)</b>				
PT48	1/2"	.875	.025	9
PT58	5/8"	.875	.025	10
PT68	3/4"	.875	.025	12

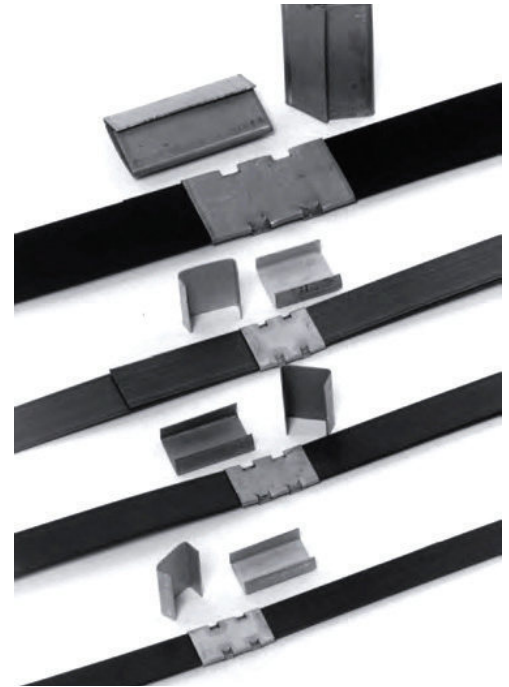


### Heavy Duty

PRODUCT	STRAP SIZE (inches)	SEAL LENGTH (inches)	THICKNESS (inches)	SHIPPING WGT. (lbs./M)
<b>OPEN SEALS</b>				
OST68HD	3/4	1 3/4	.030	25
OST125HD	1 1/4	2 1/4	.030	47
<b>OVERLAP SEALS (PUSH TYPE)</b>				
PT68HD	3/4	1 3/4	.030	34
PT125HD	1 1/4	2 1/4	.030	68

#### APPLICATION TIPS PLASTIC STRAPPING SEALS

##### OPEN SEALS

(OST Type) The most common seal for regular-duty applications, open seals allow you to place the seal on after tensioning has occurred. Also occasionally referred to as snap-on seals.



##### PUSH TYPE

(PT Type) Sometimes called full overlap seals, push type seals are used with round bundles, and with pusher tools in heavy-duty applications. These seals must be threaded on prior to application.

