


PAC Strapping Products brings you 4 solutions to your light- and medium-duty pallet strapping needs. Each unit will deliver consistent tension, superior seal joints, and save labor and seal costs. All of our pallet strapping units come with a robust warranty, complete parts support, and are backed by our own in-house service department.

## Pallet PAC MV

This semi-automatic pallet strapper is ideal for light-duty pallets that need to be strapped vertically. It's portable so it goes to the pallet. Pallets are strapped with consistent tension with high-efficiency heat seal joints. The Pallet PAC MV can strap pallets as low as 12" high.

### TECHNICAL SPECIFICATIONS

Dimensions:	21"L x 27.4"W x 39.4"H without lance
Lance Length:	49.2"
Weight:	200 lbs.
Strap Type & Size:	Polypropylene 3/8", 9mm – 5/8", 15.5mm
Core Size:	8x8, 9x8
Tension:	33 – 100 lbs.
Power Requirements:	110V, Single phase 50/60 Hz

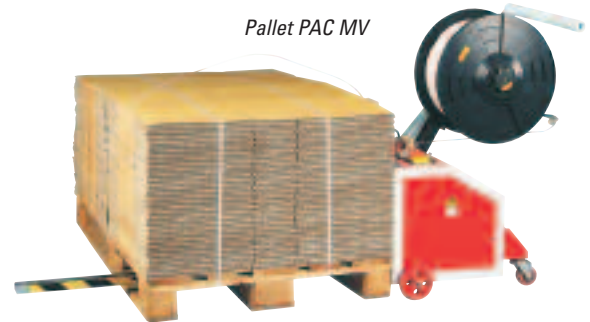


Pallet PAC MV

## Pallet PAC MVB

The "B" version of the Pallet PAC MV is similar to the standard model except it is powered by a rechargeable 24-volt battery.

### TECHNICAL SPECIFICATIONS

Dimensions:	39.5"L x 27.4"W x 39.4"H without lance
Lance Length:	49.2"
Weight:	403 lbs.
Strap Type & Size:	Polypropylene 3/8", 9mm – 5/8", 15.5mm
Core Size:	8x8, 9x8
Tension:	33 – 100 lbs.
Power Requirements:	110V, Single phase 50/60 Hz
Battery Recharge Time:	12 hours
Battery Life Per Charge:	14 hours (approximately 600 cycles)

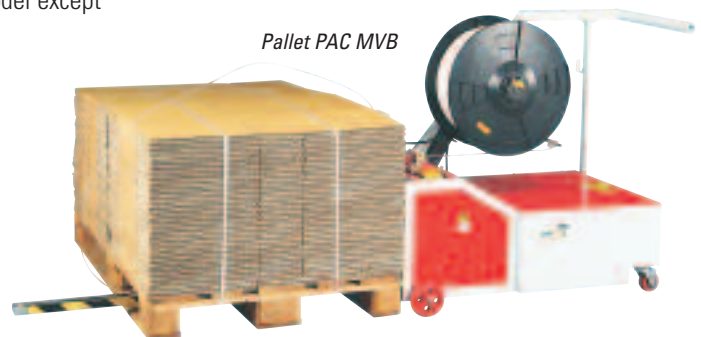


Pallet PAC MVB

## Pallet PAC Plus

The Pallet PAC Plus eliminates manual tools and seals, and is ideal for light to medium pallet strapping applications. The Pallet PAC Plus runs polyester strapping and applies a high seal joint friction weld. A telescoping lance retracts when not in use.

### TECHNICAL SPECIFICATIONS

Dimensions:	40"L x 21.6"W x 38.3"H
Lance Length:	49.2"
Weight:	385 lbs.
Strap Type & Size:	Polyester or polypropylene 1/2", 12mm – 5/8", 15.5mm
Core Size:	16x6
Tension:	45 – 330 lbs. (maximum tension with polyester only)
Power Requirements:	110V, Single phase 50/60 Hz

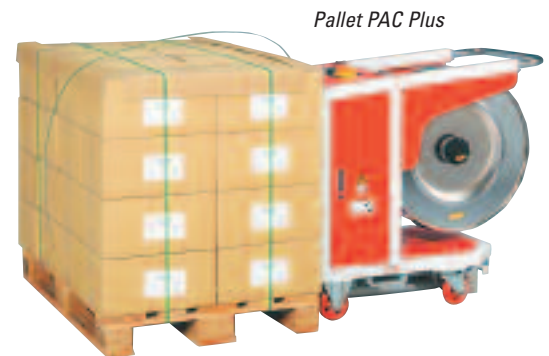

Pallet PAC Plus

## Pallet PAC MH

This unit is designed to apply horizontal straps to light-duty pallets. The strapping head moves vertically, allowing precise placement of multiple straps. Originally designed for the fruit and produce industry, the Pallet PAC MH has a wide range of applications. The Pallet PAC MH is also available with a battery pack.

### TECHNICAL SPECIFICATIONS

Dimensions:	43.3"L x 38"W x 99"H
Strap Height Range:	8" minimum x 78.7" maximum
Weight:	572 lbs.
Strap Type & Size:	Polypropylene 3/8", 9mm – 5/8", 15.5mm
Core Size:	8x8
Tension:	33 – 100 lbs.
Power Requirements:	110V, Single phase 50/60 Hz

